

- FLOW MAY BE IN EITHER DIRECTION
- VALVE SHAFT WILL MEET OR EXCEED AWWA C504 REQUIREMENTS
- 1.2.3.4.5.6.7.8. REFERENCE AWWA C504 FOR FLANGES AND DRILLING (ANSI 125)

- 72 TURNS TO CLOSE (24) 1" BOLTS ON MECH. JOINT OPERATED BY 2" AWWA OPERATING / WRENCH NUT
- RATED FOR 250psi WORKING PRESSURE
- GASKETS, GLANDS AND BOLTS FOR MECHANICAL JOINT FURNISHED WITH VALVE WHEN SPECIFIED ON ORDER

DWG. NO.




M&H VALVE COMPANY A DIVISION OF MCWANE INC. P.O. BOX 2088

ANNISTON, ALABAMA 36202

BD36-M33-M1110-11110 **EMW** REV. DRAWN: DATE: 05/11/2021

36" AWWA C504 BUTTERFLY VALVE MECHANICAL JOINT - RATED CL250 **BURIED OPERATOR - OPEN LEFT**

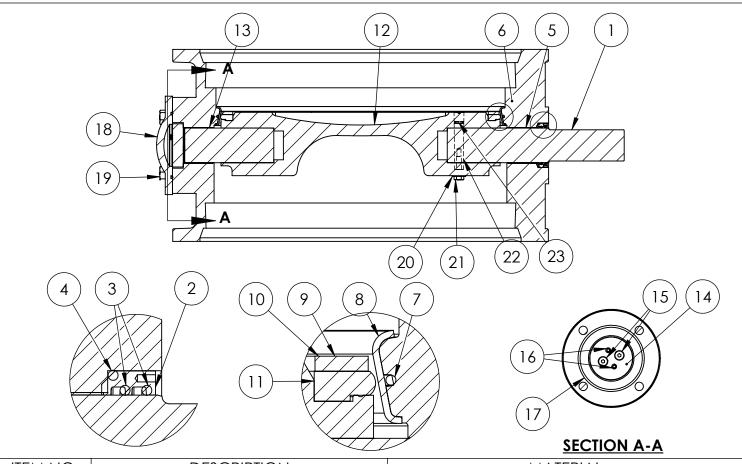

ITEM NO.	DESCRIPTION	MATERIAL
1	OPERATOR SHAFT	63 STAINLESS STEEL, ASTM A-564
2	SHAFT CARTRIDGE SEAL	BRONZE
3	CARTRIDGE SEAL O-RING (INSIDE)	BUNA-N
4	CARTRIDGE SEAL O-RING (OUTSIDE)	BUNA-N
5	UPPER BODY BUSHING	FIBERGLIDE BACKED WITH STAINLESS STEEL
6	VALVE BODY	DUCTILE IRON, ASTM A-536, GR 70-50-05
7	BODY O-RING	EPDM
8	BODY SEAT RING	316 STAINLESS STEEL, ASTM A-276
9	VANE BOLTS	18-8 STAINLESS STEEL
10	VANE CLAMP RING	304 STAINLESS STEEL, ASTM A-276
11	VANE SEAT RING	EPDM
12	VANE	DUCTILE IRON, ASTM A-536, GRADE 70-50-05
13	LOWER BODY BUSHING	FIBERGLIDE BACKED WITH STAINLESS STEEL
14	THRUST BEARING	BRONZE
15	BEARING CAP SCREW	18-8 STAINLESS STEEL
16	BEARING SET SCREW	18-8 STAINLESS STEEL
17	END COVER O-RING	EPDM
18	END COVER	DUCTILE IRON, ASTM A-536, GR 70-50-05
19	END COVER BOLTS	18-8 STAINLESS STEEL
20	TAPER PIN WASHER	416 STAINLESS STEEL
21	TAPER PIN BOLT	304 STAINLESS STEEL
22	TAPER PIN	416 STAINLESS STEEL
23	TAPER PIN O-RING	EPDM

THIS DWG. AND ALL INFORMATION IS OUR PROPERTY AND SHALL NOT BE USED, COPIED, OR REPRODUCED WITHOUT WRITTEN CONSENT. DESIGN AND INVENTION RIGHTS RESERVED.

MH

M&H VALVE COMPANY

A DIVISION OF MCWANE INC. P.O. BOX 2088 ANNISTON, ALABAMA 36202
 DWG. NO.

 BBCC-M33-B0000-11110

 DRAWN:
 EMW

REV.

DATE: 03/22/2021

30"-48" AWWA C504 BUTTERFLY VALVE MECHANICAL JOINT - RATED CL250 BODY SUB-ASM MATERIAL LIST